

RESOURCE-SAVING MAINTENANCE AND REPAIR OF SPECIAL SELF-PROPELLED ROLLING STOCK

Z. G. Mukhamedova, R. Yu. Tursunkhodjaeva, Z. V. Ergasheva, M.S. Tashmatova, V.V. Ergasheva

Tashkent State Transport University, Tashkent, Uzbekistan.

E-mail: ziyoda87@yahoo.com

ABSTRACT

The article provides the issues of improving the models of reliability and optimization of maintenance and repair of special self-propelled rolling stock (SPRS) with a compatible system of diagnostics. A new maintenance strategy is proposed, taking into account the new requirements of the self-propelled rolling stock. Examples of solving practical problems of reliability indices are considered.

The study of the reliability of SPRS, as an object, is advisable to start with its presentation in the form of a system of assembly units. In this sense, the level of consideration is important. Figure 1 gives a structural diagram of SPRS, as a system consisting of elements. for several possible levels of consideration. SPRS, as a system of elements, makes it possible to concretize the task of analyzing and improving the reliability model and developing measures to perfect it.

Keywords:

rail service cars, resource, models, track motorcars, various equipment, maintenance, special diagnostics.

Article Received: 18 October 2020, Revised: 3 November 2020, Accepted: 24 December 2020

Introduction

The development of a reliability model for special self-propelled rolling stock (SPRS), which unites a class of different types of rail service cars, track motorcars, provides for the solution of the tasks aimed at ensuring the good condition of the equipment, economical operation, carried out with a certain frequency and sequence at optimal labor and material costs, and in the final stage of maintenance aimed to prevent the downtime of the transportation process.

The study of the reliability of SPRS, as an object, is advisable to start with its presentation in the form of a system of assembly units [1, 2]. In this sense, the level of consideration is important. Figure 1 gives a structural diagram of SPRS, as a system consisting of elements. for several possible levels of consideration. SPRS, as a system of elements, makes it possible to concretize the task

of analyzing and improving the reliability model and developing measures to perfect it.

Methods of research

The diagram of the interrelation of the system and elements of SPRS is insufficient to determine the dependencies and quantitative characteristics of reliability since it is provided only as constructive and functional links.

Therefore, in the study of reliability, it is advisable to use structural and logical block diagrams and determine the qualitative and quantitative effects on the structural and parametric reliability of the object [3, 4].

If the elements of the system are logically connected in series, then each element predetermines all reliability indices, and if the elements are connected in parallel, then the failure of one element may not affect the failure of the object or its units.

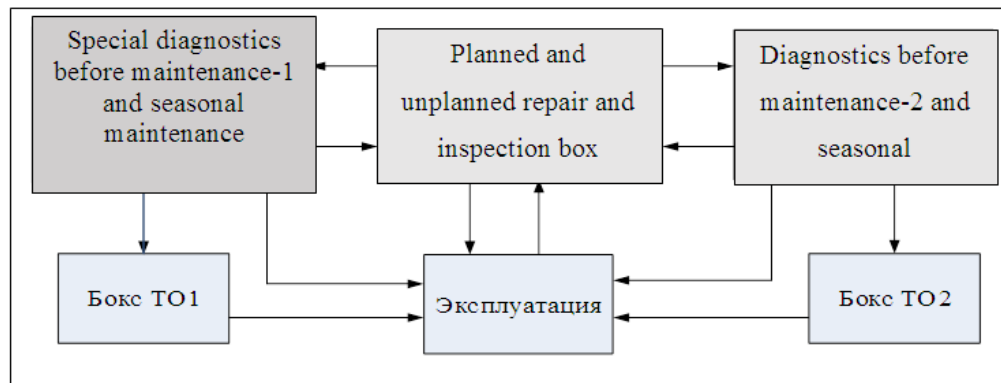


Fig. 1. An approximate diagram of relations of various equipment and elements for the analysis of the SPRS reliability.


Generally, units of the same type have a non-deterministic random operating time to failure, which has a variance relative to the mean mathematical value of the mileage L_{av} , described by a certain distribution law $f(l)$. In practice, if we assume that the overhaul period is L_{av} , then during this mileage more than half of the units will have failures with certain consequences, and the other part of the units replaced during scheduled repairs will have the remaining resource underutilized [5].

As already mentioned, SPRS is an object that has different equipment: mechanical, hydraulic, electrical equipment, and brake units; they have different maintenance periods. For example, the shift-time technical inspection (SI) - technical maintenance-1 is conducted every 140 hours of platform operation, maintenance-2 is conducted every 420 hours of platform operation, seasonal technical maintenance is conducted twice a year, technical inspection is conducted at least

once a year, and complete technical inspection is conducted at least once in 3 years [6]. At the same time, according to our observations, each type of equipment has an average mileage L_{av} . As a result, a contradictory situation arises: a certain number of units will have failures, leading to emergencies with corresponding costs, while others will have underutilized remaining resources, leading to certain reduced costs.

The above conditions and the inconsistency of the average mileage of each type of equipment put at the forefront the urgent problem of developing a mathematical model to optimize the overhaul period L_{av} of SPRS, which would correspond to the minimum total costs, taking into account the increase of the object reliability by using modern methods and means of technical diagnostics combined with the maintenance and repair [7] (Fig. 2).

Fig. 2. Diagram of the combined organization of diagnostics, maintenance and repair.

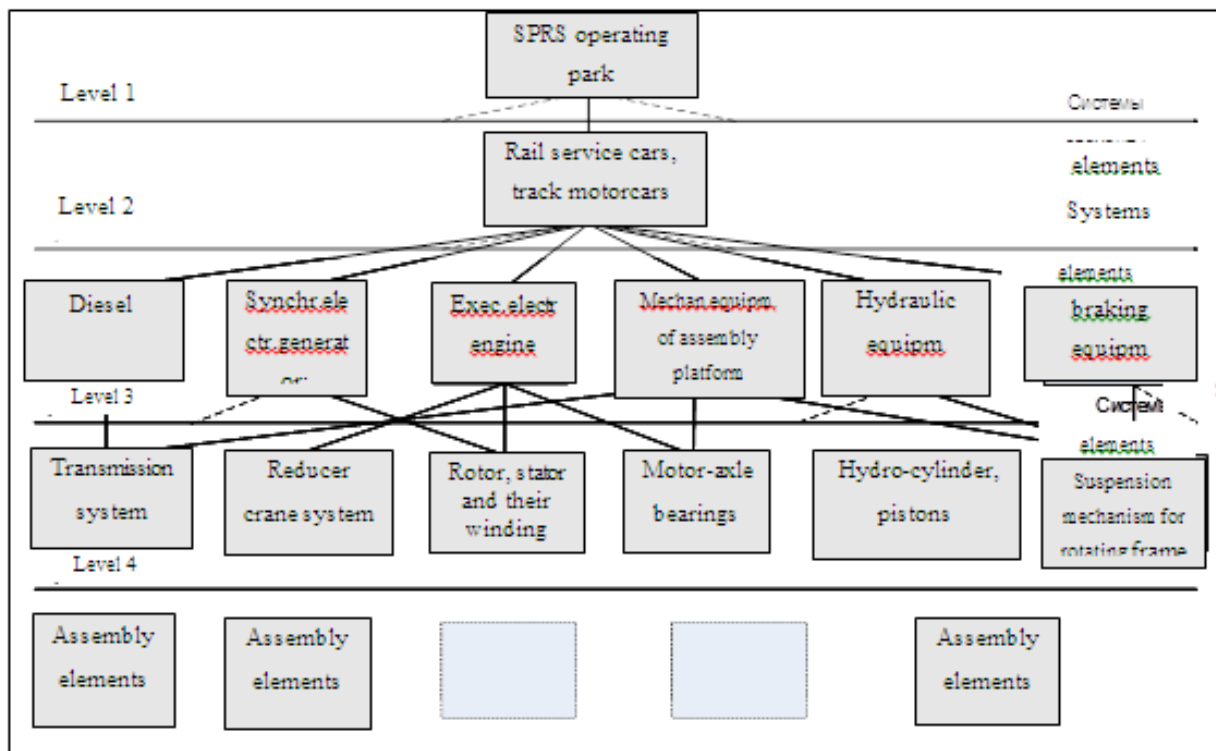

In the process of SPRS diagnostics, apart from identifying the values of the operability and reliability parameters and numerical characteristics of reliability, ensuring a high level of quality condition and functioning of the equipment and units specified in the operation manual [2], the following technical and operational parameters are necessary to control the modern rolling stock [8]:

- mileage, speed, acceleration of driven and driving links of a mechanism or a drive;
- insulation of working and transition platforms and insulation of electrical equipment;
- the end positions of the links of mechanisms, the spread of their position, positioning;
- nonuniform rotation or translational movement of the links of mechanisms;
- forces and moments acting on the links of mechanisms and drives;
- pressure in the hydraulic and pneumatic systems;
- power consumed by electric engines;
- points of time of giving commands for switching on gears, couplings, and devices;

- starting and ending time of the mechanisms;
- temperature and areas of temperature field change;
- parameters of rigidity and elastic deformations of individual links of mechanisms;
- the level of noise and vibrations during the operation of hydraulic and electrical equipment mechanisms;
- operation and smoothness of movement of spools, solenoids, and control system devices;
- units of rotation and accuracy of the cam, pinion, rotary-locking mechanisms.

When diagnosing and assessing the monitored parameters, a differentiated method to determine machine conditions is possible, taking into account the modes of operation, the degree of technical and operational parameters effect on the durability and reliability.

Analysis of the results of operation of various types of SPRS [9], and long-term exchange of domestic and foreign experiences make it possible to formulate the main tasks and methods for improving the maintenance and repair with a combination of methods and technical

means of diagnostics, to significantly increase their reliability (Fig. 3).

Consider an example of assessing the reliability standards indices, taking into account the fact that the operating time to failure for each type of mechanical and hydraulic electrical equipment is subject to an exponential distribution law [6]. In 2017-2019, 18 assembly units of the ADM1 type rail service cars were observed on an assembly platform according to the inspection plan $[N, U, T]$, based on the materials presented by the Railway Engineering Department of the Mechanization Directorate of JSC "Uzbekiston temir yullari", where N is the number of objects determined by the formula

$$\delta + 1 = 2N/\chi_{(1-\beta, 2N)}^2,$$

where δ is the reduced relative error, $\chi_{(1-\beta, 2N)}^2$ is the distribution quantile xu - a square at the number of degrees of freedom; after the failure, assembly units of the assembly platform were not replaced; tests were conducted until all units failed. The observations were performed for $T = 2000$ hours. During this time, $d = 8$ of different types of assembly units (parallelograms of the lifting mechanism, pumping station, hydraulic cylinder, and adjustable throttles) failed.

The operating hours of each assembly unit are shown below

d	1	2	3	4	5	6	7	8
t_i, h	120	150	230	380	521	683	1097	1509

As is known from the reliability theory, if the operating time to failure is subject to an exponential distribution law, then taking failure as a limiting state, we can talk about the resource

instead of operating time to failure.

The following estimates of reliability indices [10] are calculated:

Average resource at $\gamma = 95\%$:

$$\hat{\lambda} = \frac{d}{\sum_{i=1}^d t_i + (N-d)T} = \frac{8}{4820 + (18-8) \cdot 2000} = 0,00032 \text{ 1/hour.}$$

Let us determine the confidence two-sided bounds with a confidence probability $\beta = 0.95$;

according to Table 1 of State standards GOST 17509-72 we have:

Lower bounds

$$\lambda_N = \frac{\hat{\lambda} N \chi_{\frac{1-\beta}{2}, 2d}^2}{d(2N - d + \frac{1}{2} \chi_{\frac{1-\beta}{2}, 2d}^2)} = \frac{0,00032 \cdot 20 \cdot 8,12}{8(2 \cdot 18 - 8 + \frac{1}{2} \cdot 8,12)} = 0,00026 \text{ 1/hour.}$$

Upper bounds

$$\lambda_V = \frac{\hat{\lambda} N \chi_{\frac{1-\beta}{2}, 2d}^2}{d \left(2N - d + \frac{1}{2} \chi_{\frac{1-\beta}{2}, 2d}^2 \right)} = 0,00044 \text{ 1/hour.}$$

Thus, the interval (0.00012-0.00044) with probability covers the unknown parameter λ .

Let us determine one-sided confidence bounds with a confidence level of $\beta = 0.95$ [3]:

$$\lambda_{aH} = \frac{\hat{\lambda} N \chi_{1-\beta, 2d+2}^2}{d(2N - d + \frac{1}{2} \chi_{1-\beta, 2d+2}^2)} = \frac{0,00032 \cdot 18 \cdot 10,01}{8(2 \cdot 18 - 8 + \frac{1}{2} \cdot 10,01)} = 0,00023 \text{ 1/hour.}$$

Therefore, $\hat{\lambda} > 0,00022$, that is, the interval (0.00022- ∞) with a probability of 0.95 covers the unknown parameter λ

$$\lambda_{o.B} = \frac{\hat{\lambda} N \chi_{\beta, 2d+2}^2}{d(2N - d + \frac{1}{2} \chi_{\beta, 2d+2}^2)} = \frac{0,00032 \cdot 18 \cdot 25,8}{8(2 \cdot 18 - 8 + \frac{1}{2} \cdot 25,8)} = 0,00055 \text{ 1/hour.}$$

Average resource is $\hat{\lambda} < 0,00055$, i.e. the interval (0-0.00055) with a probability of 0.95 covers the unknown parameter λ .

According to Table 7 [10], we determine

$$\begin{aligned} T_{p.cp} &= \frac{1}{\hat{\lambda}} = \frac{1}{0,00032} = 3125 \text{ h.} \\ T_{p.cp.H} &= \frac{1}{\lambda_B} = \frac{1}{0,00044} = 2272 \text{ h.} \\ T_{p.cp.B} &= \frac{1}{\lambda_H} = \frac{1}{0,00026} = 3846 \text{ h.} \end{aligned}$$

Thus, the interval (2272-3846) with a probability of 0.95 covers the true value of the average resource

$$T_{p.cpo.B} = \frac{1}{\lambda_{o.H}} = \frac{1}{0,00023} = 4347 \text{ h.}$$

In accordance with the above, we consider a method for improving the TOP model, combined with increased reliability indices, using technical means for diagnosing main equipment.

It is known that the probability of replacing

$$P = (1 - Q) * P_g = \left[1 - \int_0^{L_{cp}} f(l) dt \right] P_g, \quad (1)$$

where (1-Q) is the probability that the equipment will not fail over the period L_{av} ; $f(l)$ is the density of the probability distribution of failure

estimates of the reliability indices of the assembly platform and their confidence bounds using the data calculated above:

parts at the maintenance-1 by the conditional probability of increasing reliability as a result of using the i -th diagnostic tool equal to P_g is determined as [4, 6]:

under the exponential law [9, 10], and is defined as

$$\begin{aligned} T_{p.cp.B} &= \frac{1}{\lambda_H} = \frac{1}{0,00026} = 3846 \text{ h.} \\ f(l) &= \frac{1}{L_{av}} \exp\left(-\frac{l}{L_{av}}\right). \end{aligned} \quad (2)$$

$$\text{Then, } Q = \int_0^{L_{av}} f(l) dl = \int_0^{L_{av}} \frac{1}{L_{av}} \exp\left(-\frac{l}{L_{av}}\right) dl = -\frac{1}{L_{av}} l^{-\frac{l}{L_{av}}} \Big|_0^{L_{av}}.$$

For example, at $L_{av} = 200 * 10^3$ km, and $P = 0,98$, we obtain

$$P = \left[1 - \frac{1}{200 * 10^3} \left(e^{-\frac{200*10^3}{200*10^3}} - e^{-\frac{0}{200*10^3}} \right) \right] * 0,98 = 0,977.$$

Conclusion

Taking into account the above aspects and conducting calculations based on the principal indices of reliability, which are the most important components of the SPRS technical operation system, based on a system of maintenance and repair; due to fundamental changes in designs, the emergence of new materials and repair technology requires the improvement of new technologies for maintenance and repair and the perfection of the reliability indices by introducing new monitoring and diagnostic systems.

References

- [1] Assembly platform for ADM1 rail service car. Operation manual 77.020-35.00.000, JSC Tikhoretsk machine-building plant, Tikhoretsk 2012, 24 p.
- [2] Guk Yu.B. Reliability theorem for the electric power industry. L. Energoatomizdat, 1990, 208 p.
- [3] Reliability of mechanical engineering products, State standards GOST 17509-72.
- [4] Strakopytov V.V. Reliability and technical

- diagnostics of locomotives. - M.: Transport, 2001-288 p.
- [5] Diagnostics of products. General requirements. – State standards GOST P 53480-2009-M.: Publishing house of standards, 2011-30 p.
- [6] Bobrovnikov Ya.Yu., Stetsyuk A.E. Diagnostic complexes of electric rolling stock - Khabarovsk: Publishing house of 83 p.
- [7] Mukhamedova Z.G., Khromova G.A., Yutkina I.S. Mathematical Model of Oscillations of Bearing Body Frame of Emergency and Repair Railcar, Journal «Transport Problems», Volume 12, Issue 1, Gliwice 2017, pp. 93 – 103.
- [8] Popa G., Badea C. et al. Dynamic Oscillations Features of the Br 185 Locomotive Series. Journal of the Balkan Tribological Association, 2016, Volume 22, no.1, pp. 66 – 73.
- [9] Mukhamedova Z.G. Modelling of fluctuations in the main bearing frame of railcar// International Journal of Modern Manufacturing Technologies, 2016, 8(2), pp. 48–53
- [10] 10. Mukhamedova Z.G. Automation of the strength characteristics calculation of the frame of special self-propelled rolling stock // Certificate of official registration of the computer program in the Agency for Intellectual Property of the Republic of Uzbekistan, No. DGU 07628, Tashkent, 2020.